

Poly Loc™ Diverting Agent

kuraray

Kuraray Poval™

Kuraray Poval™

Poly Loc™ Diverting Agent

Poly Loc™ is an effective chemical diverting agent capable of providing a temporary diversion to enhance stimulation of the perforation clusters in the targeted zones in a wellbore.

Poly Loc™ is a class of water-soluble diverting agents and as a result, dissolve quickly to reduce the non-productive time without the need to add acid.



Some of the features of Poly Loc™


- Water-soluble regardless of pH
- Will not re-solidify once dissolved
- Temperature range between 70°F (20°C) and 220°F (104°C)
- Wide particle-size distribution
- Compatible with most fracturing chemicals
- Composed of a non-toxic base material
- Does not contain corrosive elements such as halogens
- Granular asymmetrical free flowing solid

Physical properties of Poly Loc™ M01-2

Form	White granular solid
Specific gravity	1.1 - 1.3
pH	5.0 - 9.0
Particle size	Under 6 US Mesh
Temperature of operation	70°F - 220°F (20°C - 104° C)





Solubility of Poly Loc™ M01-2

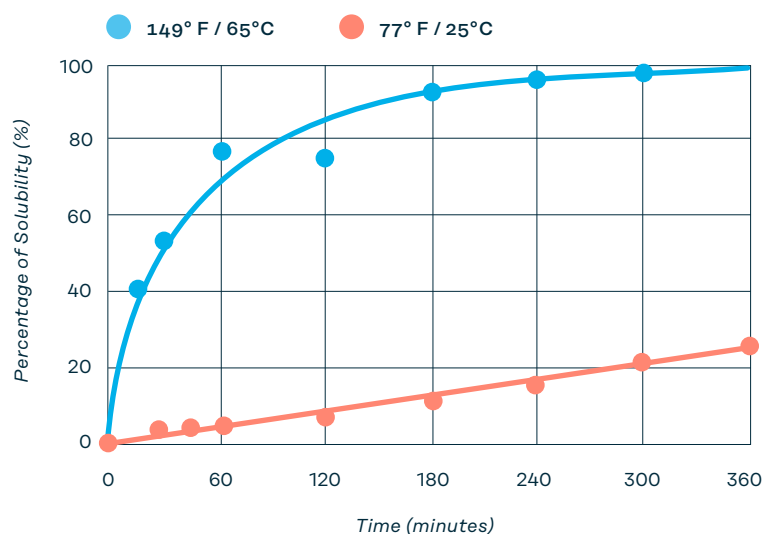

Column slot test of Poly Loc™ M01-2

- Wide particle-size distribution enables superior bridging
- Retains approximately 86% of the fluid at 200 psi for 15 sec.

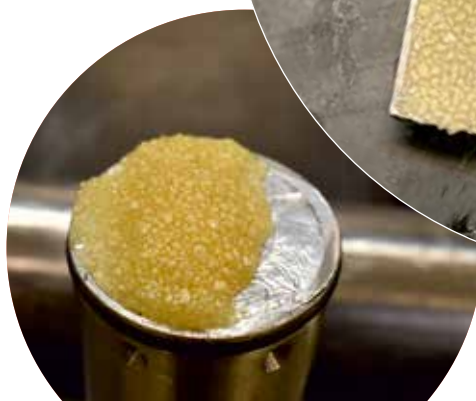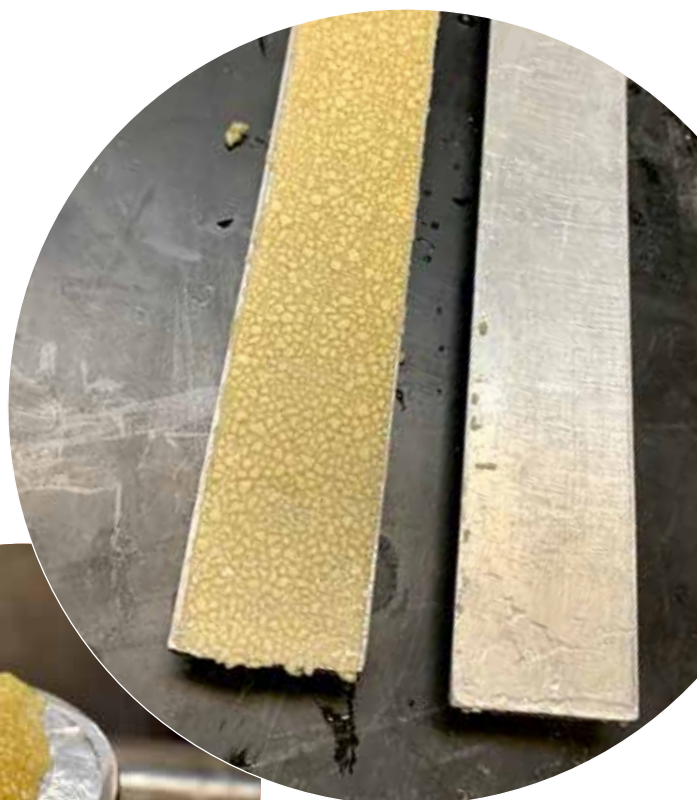

Adding value to your products – worldwide

KURARAY POVAL™, EXCEVAL™, ELVANOL™, and MOWIFLEX™ are the trademarks for polyvinyl alcohols (PVOH) made by Kuraray. Their key characteristics — outstanding film-forming properties and high binding strength — add real value to your products. Our polymers are water-soluble, highly reactive, crosslinkable and foamable. They have high pigment binding capacity, protective colloid characteristics and thickening effects. The physical and chemical properties of KURARAY POVAL™ make it ideal for a wide variety of applications, ranging from adhesives through paper and ceramics to packaging films. Many of our polymers are food contact-approved and thus suitable for food applications.

Kuraray produces its wide range of KURARAY POVAL™ grades in Japan, Singapore, Germany and the USA. Kuraray's global production and service network make us your partner of choice for innovative high-quality PVOH resins.



Kuraray Poval™

PLEASE CONTACT US
kuraray-poval.com

kuraray

HEADQUARTERS

Kuraray Co., Ltd.

Tokiwabashi Tower
2-6-4, Otemachi
Chiyoda-ku
Tokyo, Japan 100-0004

Kuraray America, Inc.

3700 Bay Area Blvd.,
Suite 680 Houston, TX 77058
United States of America

Kuraray Asia Pacific Pte., Ltd.

1 North Buona Vista Link
#12-10/11, Elementum
Singapore 139691

Kuraray Europe GmbH

Philipp-Reis-Str. 4
65795 Hattersheim am Main,
Germany

Kuraray China Co., Ltd.

Unit 2207, 2 Grand Gateway
3 Hongqiao Road, Xuhui District, Shanghai
200030, China

DISCLAIMER

KURARAY POVAL™, EXCEVAL™, ELVANOL™, and MOWIFLEX™ are the trademarks or registered trademarks of Kuraray or its affiliated companies. The information, recommendations, and details in this document are provided based on sufficient consideration to the best of Kuraray's knowledge. However, they are not intended to guarantee any characteristics beyond the product specifications. Customers should verify the suitability of our products for their intended use and compliance with relevant laws and regulations. Neither Kuraray nor any of its affiliated companies makes any warranty or responsibility for any errors, inaccuracies, or omissions in this document.